


This model was previously released as AAS-12HF-DMDMR-xM

## 12HFDMDMR<sub>xxx</sub>

7/16 DIN Male to 7/16 DIN Male Right Angle, 1/2" Superflexible Cable

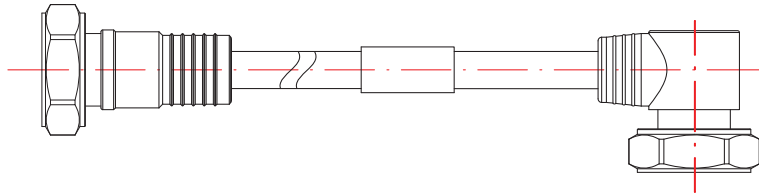

Electrical Characteristics	
Frequency Range	DC-3.8 GHz
VSWR	≤ 1.12
Insertion Loss (2.7 GHz)	≤ 0.1945*L +0.2 dB
Intermodulation (2x43dBm)	≤ -160 dBc
Insulation Resistance	≥ 5000 MΩ
Work Voltage	1000 V
Screen Efficiency	≥ 110
Power Rating (at 2 GHz)	300 W
Impedance	50Ω
Environmental Characteristics	
Temperature Range	-40° C to +85° C (-40° F to +185° F)
Weatherproofing Standard	IP68
RoHS Compliant	Yes
Mechanical Characteristics	
Molding	Over-Molding
Nut (Thread) Torque	7/16-DIN 25 Nm
Torsion (Cable Connect)	4 Nm
Tensile Force (Cable Connect)	500 N
Minimum Bend Radius, Repeated Bend	32 mm (1.3 in)
Number of Bends (Minimum)	15

### Ordering Options

When ordering, replace the "xxx" in the model number with the length of cable in meters.

Cable Length	Model Number
0.5 Meter cable length	12HFDMDMR005
1.0 Meter cable length	12HFDMDMR010
1.5 Meter cable length	12HFDMDMR015
2.0 Meter cable length	12HFDMDMR020
2.5 Meter cable length	12HFDMDMR025
3.0 Meter cable length	12HFDMDMR030
3.5 Meter cable length	12HFDMDMR035
4.0 Meter cable length	12HFDMDMR040
4.5 Meter cable length	12HFDMDMR045
5.0 Meter cable length	12HFDMDMR050

Cable Length	Model Number
5.5 Meter cable length	12HFDMDMR055
6.0 Meter cable length	12HFDMDMR060
6.5 Meter cable length	12HFDMDMR065
7.0 Meter cable length	12HFDMDMR070
7.5 Meter cable length	12HFDMDMR075
8.0 Meter cable length	12HFDMDMR080
8.5 Meter cable length	12HFDMDMR085
9.0 Meter cable length	12HFDMDMR090
9.5 Meter cable length	12HFDMDMR095
10.0 Meter cable length	12HFDMDMR100

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.