

5056000

Ultra-Broad Multi Band | Ceiling Mount Omni | V-Pol | 360° | 2.1-5.0 dBi

- Indoor, Ceiling Mount Omni-Directional Antenna
- Ultra-Broad, Multi Band Performance



Ordering Options		Model Number
Antenna with N-Type Connector		5056000
Antenna with 4.1/9.5 Mini-DIN Connector		5056000-mDIN
Antenna with 7/16-DIN Connector		5056000-DIN
Electrical Characteristics		
Frequency Band	330-960 MHz	1710-6000 MHz
Polarization	Vertical	
Horizontal Beamwidth	360°	360°
Vertical Beamwidth	60°	60°
Gain	2.1 dBi	5.0 dBi at 1710-2170 MHz 5.0 dBi at 2400-6000 MHz
Impedance	50Ω	
VSWR	330-350 MHz	< 2.8:1
	350-6000 MHz	< 2:1
Passive Intermodulation (2x20W)	-150 dBc*	
	<i>*PIM Value for N-Type only applicable at date of manufacture</i>	
Input Power	50W	
Connector(s)	1 Connector / N-Type, 7/16 DIN, or 4.1/9.5 Mini-DIN / Female on Base of Antenna	
Mechanical Characteristics		
Radome Color	White	
Dimensions (Diameter x Height)	334 x 232 mm	13.1 x 9.1 in
Weight without Mounting Brackets	0.5 kg	1.1 lbs
Mounting Options		
Mounting	Ceiling mount kit included	




This model is available in the iBwave In-Building Network Components Database - www.ibwavecomponents.com


Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.

5056000

Ultra-Broad Multi Band | Ceiling Mount Omni | V-Pol | 360° | 2.1-5.0 dBi

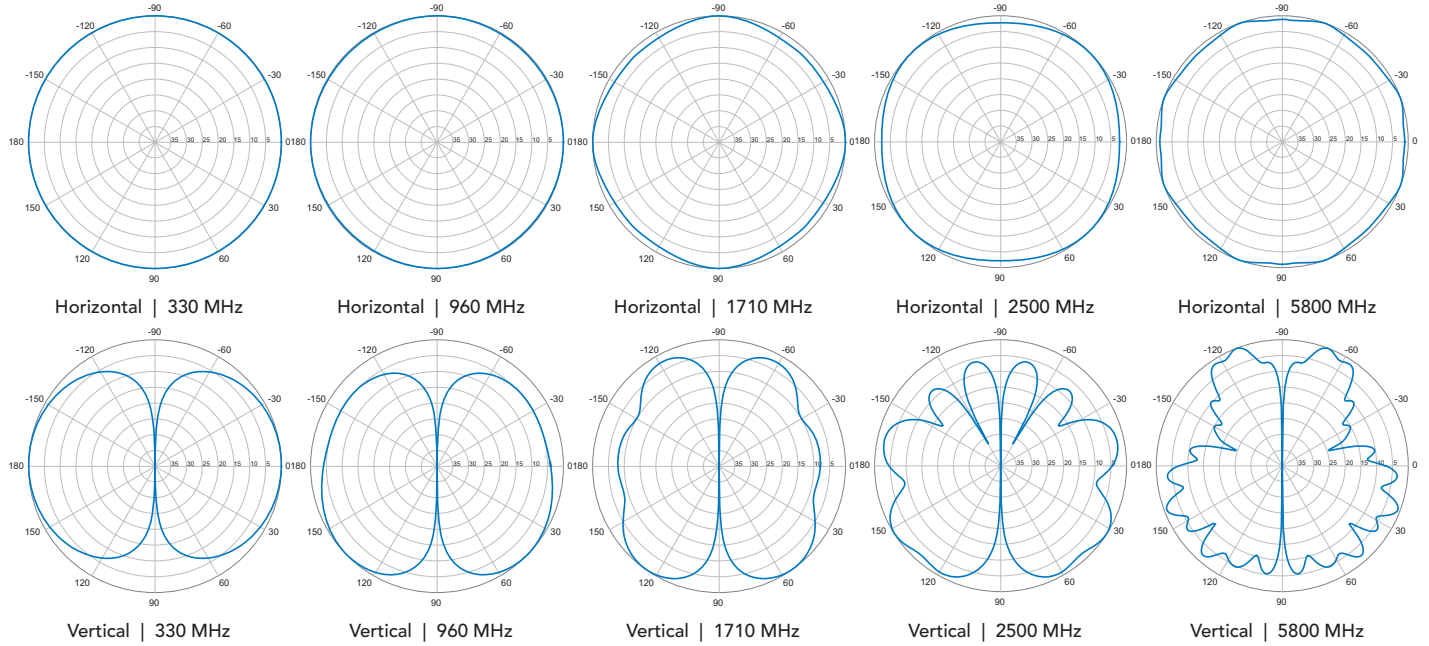

Dimensions

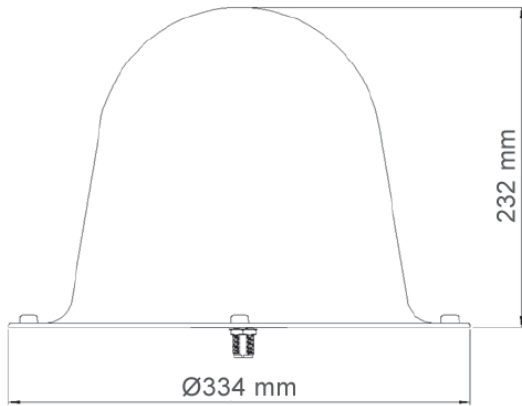

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.